


LOTUS, PILEA, ROSEAU coat stands



LOTUS COAT STAND

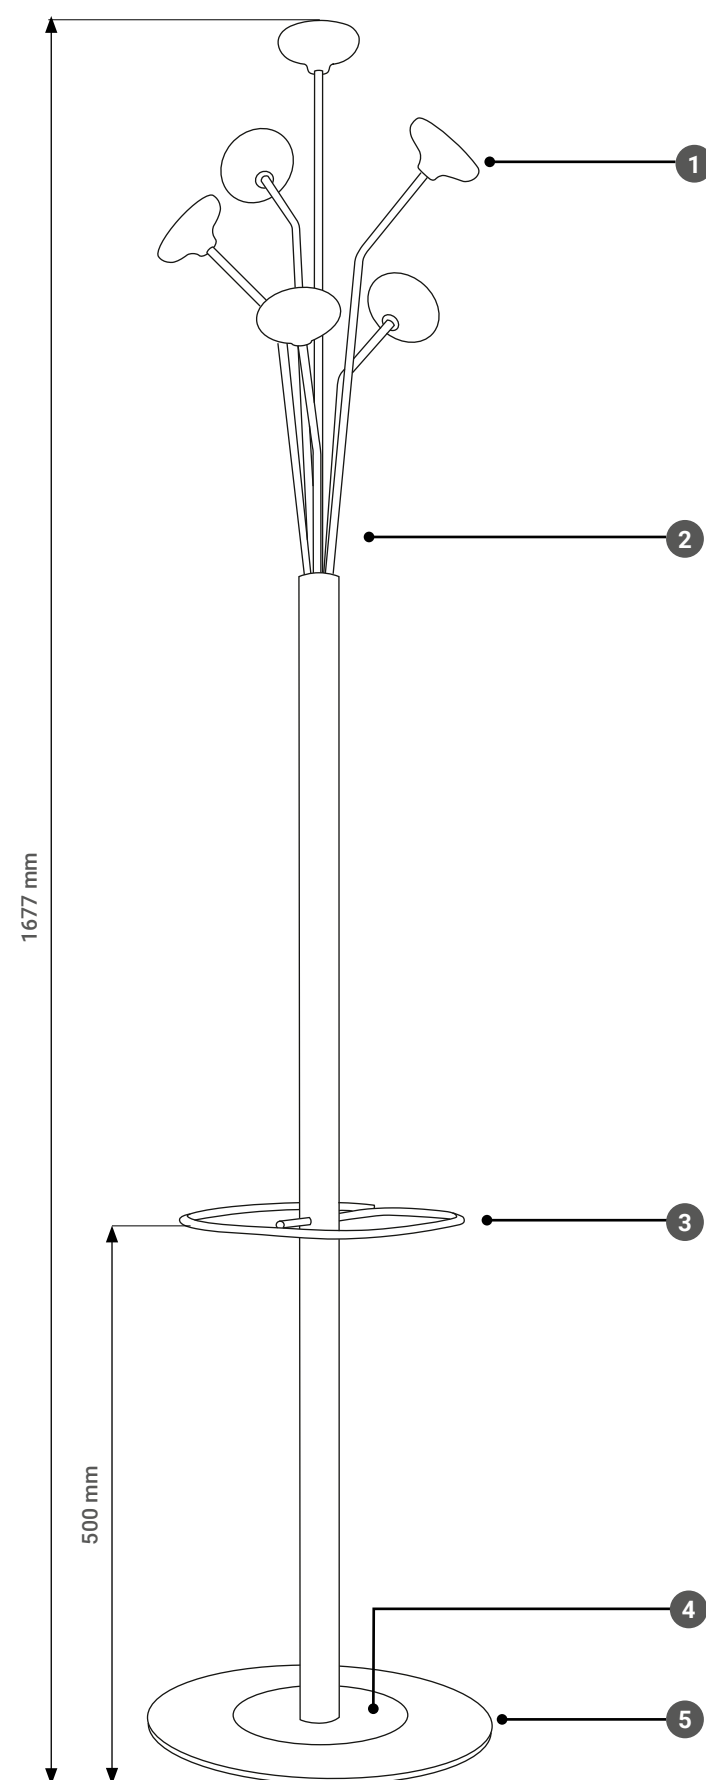

LOTUS COAT STAND

COMPONENTS

1	6 round hooks in varnished beech wood or ash wood Ø 80 x H. 40 mm
2	Set of 6 wire Ø 8 mm in powder-coated steel with barrel, welded in a 1130 mm long tube Ø 40 mm in 1.5 mm thick powder-coated steel
3	Umbrella ring 260 x 260 mm in powder-coated steel wire Ø 8 mm ⁽¹⁾
4	Drip tray in polycarbonate Ø 180 mm ⁽¹⁾
5	Round base round, Ø 340 mm, 4 mm thick, powder-coated steel, felt pads

⁽¹⁾ For coatstands with umbrella ring

REFERENCES AND PACKING INFORMATIONS


	Description	Net weight	% of recycled materials
LO L6	Lotus coat stand, 6 round hooks	8,95 kg	44%
LO L6 PP	Lotus coat stand, 6 round hooks with umbrella ring	9,34 kg	43%

The coat stands are mounted
Separable components.
The wood used to make the hooks is PEFC® certified
Our paints are free of hazardous substances in accordance with REACH regulations.
The packaging is made of recycled cardboard.



RECYCLABLE À 99%
99% RECYCLABLE

PILEA COAT STAND

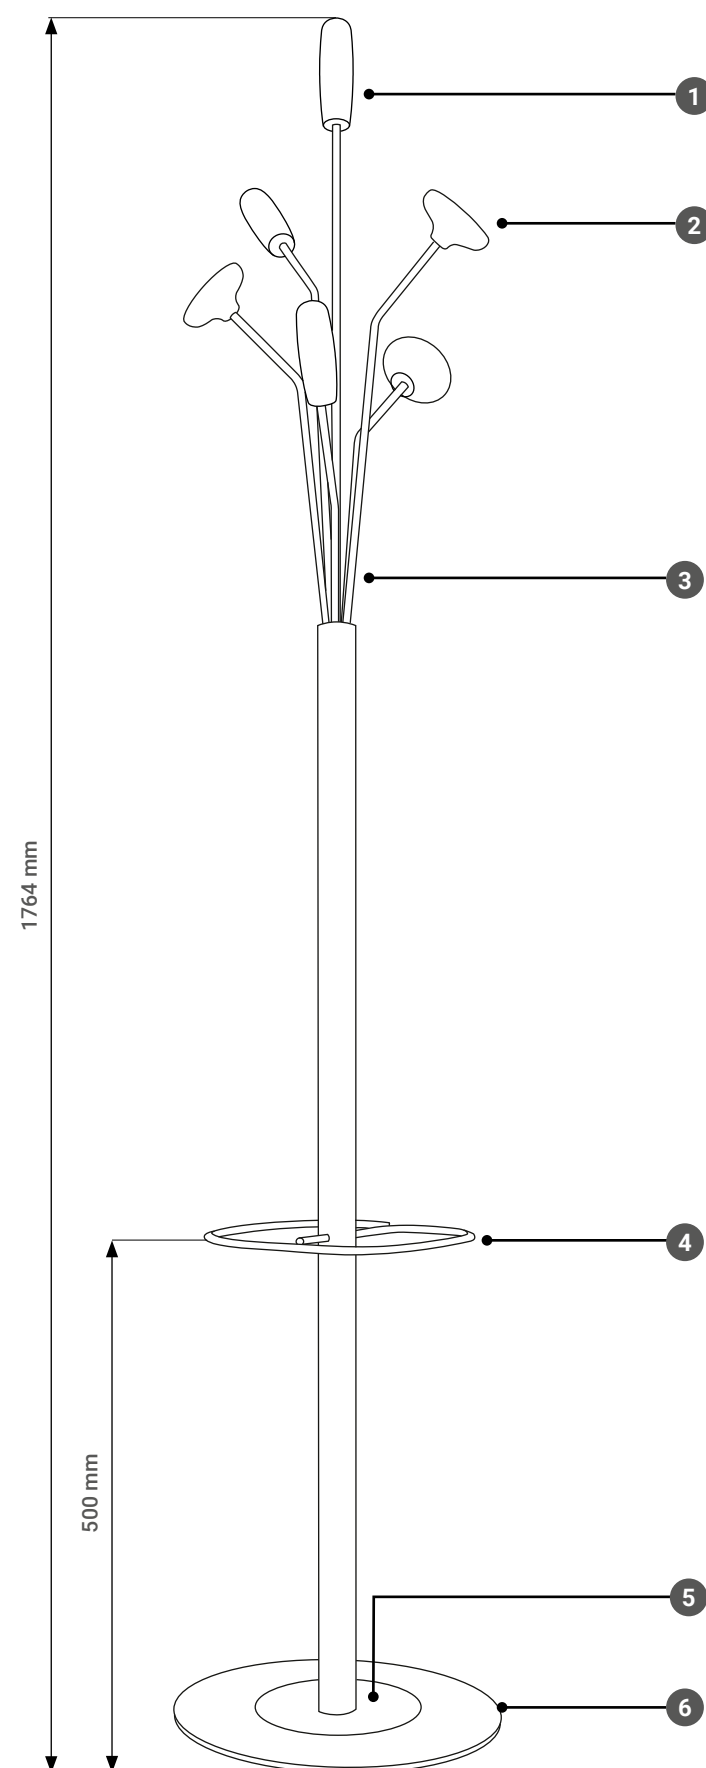

PILEA COAT STAND

COMPONENTS


1	3 oblong hooks in varnished beech wood ø 80 x H. 40 mm
2	3 round hooks in varnished beech wood ø 80 x H. 40 mm
3	Set of de 6 wire ø 8 mm in powder-coated steel wih barrel, welded in a 1130 mm long tube Ø 40 mm in 1.5 mm thick powder-coated steel
4	Umbrella ring 260 x 260 mm in powder-coated steel wire Ø 8 mm ⁽¹⁾
5	Drip tray in polycarbonate Ø 180 mm ⁽¹⁾
6	Round base rond, Ø 340 mm, 4 mm thick, powder-coated steel, felt pads

⁽¹⁾ For coatstands with umbrella ring

REFERENCES AND PACKING INFORMATIONS


	Description	Net weight	% of recycled materials
LO P6	Piléa coat stand, 3 round hooks and 3 oblong hooks	8,78 kg	45%
LO P6 PP	Piléa coat stand, 3 round hooks and 3 oblong hooks with umbrella ring	9,16 kg	44%

The coat stands are mounted
Separable components.
The wood used to make the hooks is PEFC® certified
Our paints are free of hazardous substances in accordance with REACH regulations.
The packaging is made of recycled cardboard.



RECYCLABLE À 99%
99% RECYCLABLE

ROSEAU COAT STAND

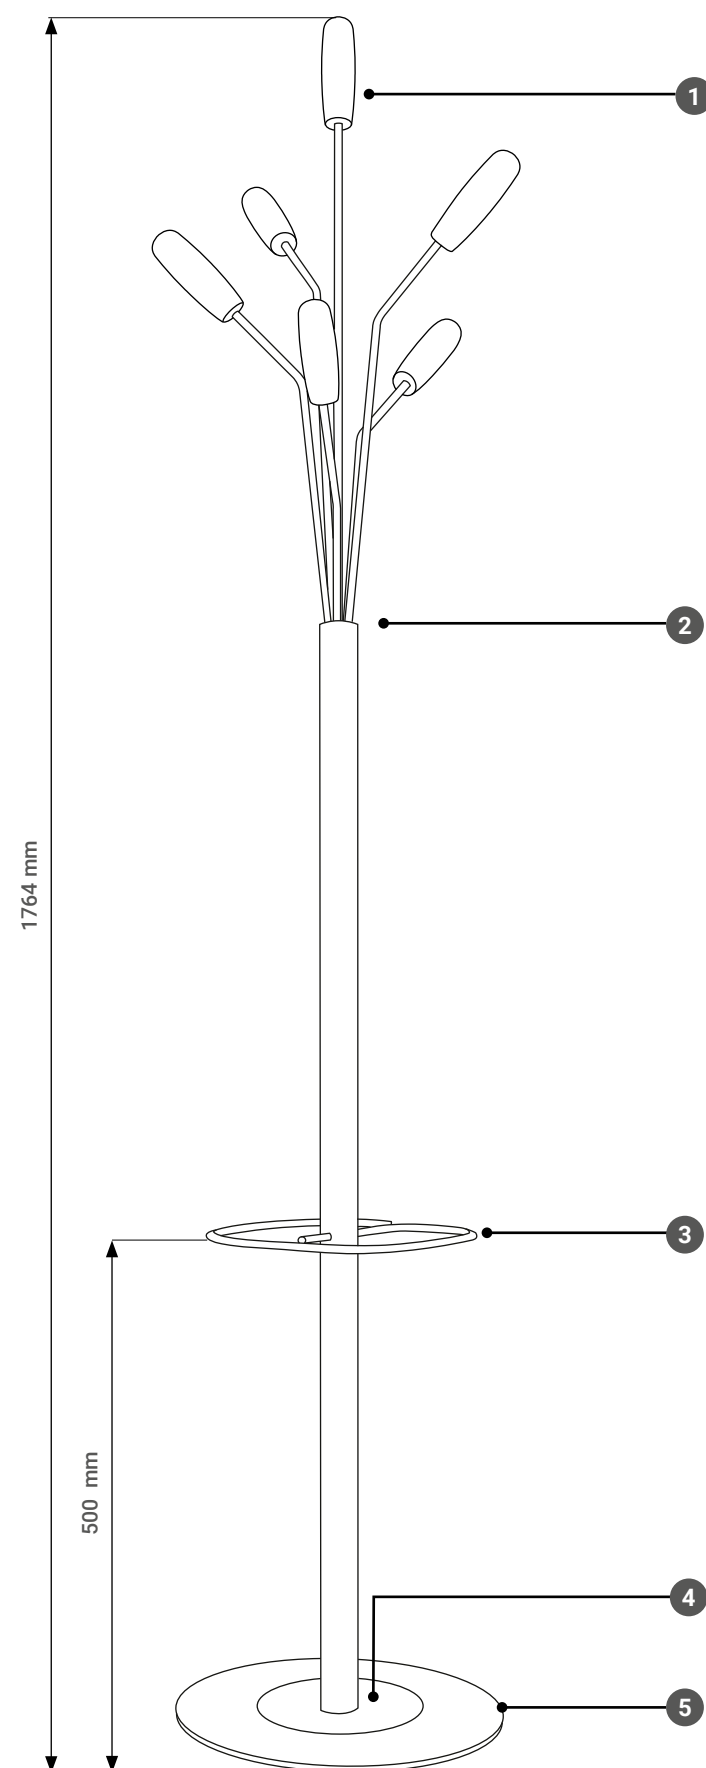

ROSEAU COAT STAND

COMPONENTS

1	6 oblong hooks in varnished beech wood \varnothing 80 x H. 40 mm
2	Set of 6 wire \varnothing 8 mm in powder-coated steel with barrel, welded in a 1130 mm long tube \varnothing 40 mm in 1.5 mm thick powder-coated steel
3	Umbrella ring 260 x 260 mm in powder-coated steel wire \varnothing 8 mm ⁽¹⁾
4	Drip tray in polycarbonate \varnothing 180 mm ⁽¹⁾
5	Round base round, \varnothing 340 mm, 4 mm thick, powder-coated steel, felt pads

⁽¹⁾ For coatstands with umbrella ring

REFERENCES AND PACKING INFORMATIONS


	Description	Net weight	% of recycled materials
LO R6	Roseau coat stand, 6 oblong hooks	8,61 kg	46%
LO R6 PP	Roseau coat stand, 6 oblong hooks with umbrella ring	8,99 kg	45%

The coat stands are mounted
Separable components.
The wood used to make the hooks is PEFC® certified
Our paints are free of hazardous substances in accordance with REACH regulations.
The packaging is made of recycled cardboard.




LOTUS HOOKS


1 MAGNETIC HOOK

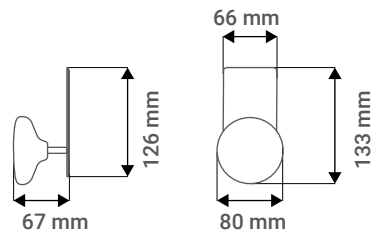


2 WALL-MOUNTED COAT HOOK

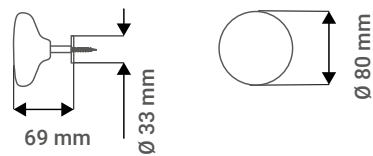


3 WALL-MOUNTED COAT RAIL WITH 2 HOOKS

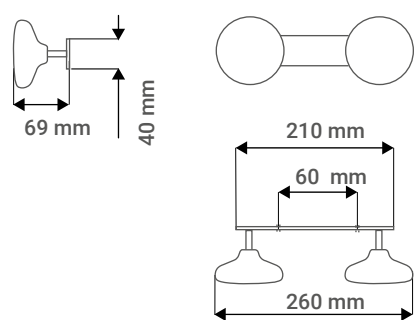

4 WALL-MOUNTED COAT RAIL WITH 3 HOOKS

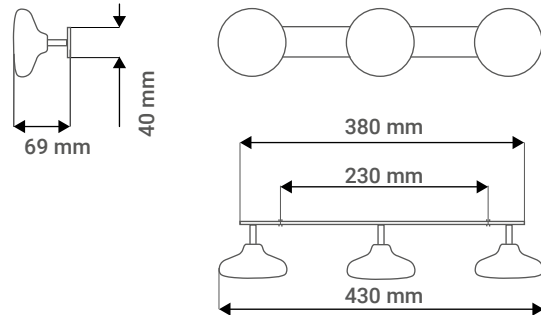

5 WALL-MOUNTED COAT RAIL WITH 5 HOOKS

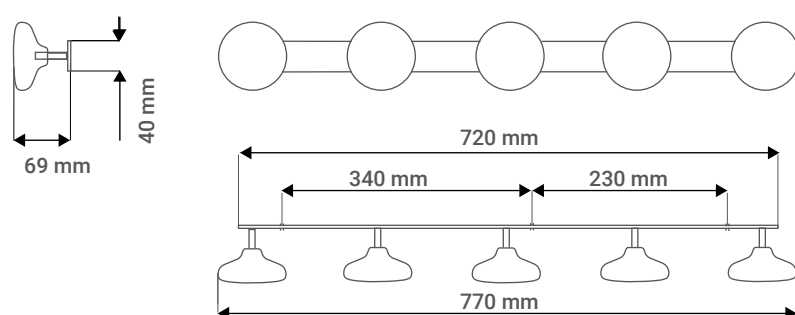

LOTUS HOOKS

COMPONENTS

1	Plate in powder-coated steel L. 66 x H. 126 mm, fitted with a 1,5 mm thick magnet, Ø 8 mm welded pin. 1 pebble hook in varnished beech wood or ash wood Ø 80 x H 40 mm. Loading weight : 9 kg
2	Screw pin Ø 8 mm on a roundsteel plate Ø 33 mm, 3 mm thick, Not suitable for plasterboard walls.1 pebble hook in varnished beech wood or ash wood Ø 80 x H 40 mm
3	Powder-coated steel plate L. 210 mm x H. 40 mm, 4 mm thick, with 2 welded steel tubes Ø 8 mm.2 screws VBA inox 5x40, 2 pins. Distance between fixing points : 60 mm 2 pebble hooks in varnished beech wood or ash wood Ø 80 x H 40 mm
4	Powder-coated steel plate L. 380 mm x H. 40 mm, 4 mm thick, with 3 welded steel tubes Ø 8 mm. 2 screws VBA inox 5x40, 2 pins. Distance between fixing points : 230 mm 3 pebble hooks in varnished beech wood or ash wood Ø 80 x H 40 mm
5	Powder-coated steel plate L. 720 mm x H. 40 mm, 4 mm thick, with 5 welded steel tubes Ø 8 mm. 2 screws VBA inox 5x40, 2 pins. Distance between fixing points : 340 / 230 mm. 5 pebble hooks in varnished beech wood or ash wood Ø 80 x H 40 mm

REFERENCES AND PACKING INFORMATIONS

	Description	Net weight	% of recycled materials
LO MA	Magnetic hook	0.37 kg	32%
LO M1	Wall-mounted hook	0,20 kg	25%
LO M2	Wall-mounted coat rail with 2 hooks	0,67 kg	27%
LO M3	Wall-mounted coat rail with 3 hooks	1,07 kg	25%
LO M5	Wall-mounted coat rail with 5 hooks	1,88 kg	25%

The coat rails are mounted
Separable components.
The wood used to make the hooks is PEFC® certified
Our paints are free of hazardous substances in accordance with REACH regulations.
The packaging is made of recycled cardboard.

